

# Dental Burs

**Diamond Burs** | **Carbide burs**



**innocent**

CE 1639

FDA

ISO

# Diamond Burs

EXTRA COARSE  
151-213µ



Type: TF-12SC TF-22SC TF-31SC TR-13SC TR-21SC TC-11SC FO-27SC SR-11SC EX-11SC EX-21SC

Total Length(mm): 22.5 19.0 19.0 22.0 20.0 22.5 19.0 21.5 19.0 19.0

Working length(mm): 10.0 5.5 4.0 9.0 7.0 10.0 5.0 8.0 5.0 5.0

ISO: 806 314 173 544 018 806 314 170 544 023 806 314 170 544 018 806 314 198 544 020 806 314 197 544 018 806 314 160 544 017 806 314 257 544 034 806 314 141 544 014 806 314 039 544 034 806 314 237 544 023

EXTRA COARSE  
151-213µ



Type: EX-26SC WR-13SC

Total Length(mm): 19.0 19.0

Working length(mm): 5.0 2.0

ISO: 806 314 237 544 034 806 314 068 544 044

COARSE  
107-181µ



Type: BR-31C FO-32C FO-54C SF-12C SI-47C TC-11C TF-13C TR-13C TR-62C WR-13C

Total Length(mm): 19.0 19.0 23.0 21.5 19.0 22.5 22.5 22.0 20.0 19.0

Working length(mm): 1.6 4.0 9.5 8.0 1.15 10.0 10.0 9.0 7.0 1.9

ISO: 806 314 001 534 019 806 314 257 534 019 806 314 190 534 019 806 314 111 534 015 806 314 010 534 015 806 314 160 534 016 806 314 173 534 019 806 314 198 534 019 806 314 197 534 018 806 314 068 534 043

STANDARD  
64-126µ



Type: BC-31 BC-32 BC-42 BC-S42 BC-S43 BC-43 BR-31 BR-40 BR-41 BR-45

Total Length(mm): 19.0 19.0 19.0 16.5 16.5 19.0 19.0 19.0 19.0 19.0

Working length(mm): 2.2 2.2 2.2 2.2 2.2 2.2 1.5 1.3 1.05 0.65

ISO: 806 314 002 524 018 806 314 002 524 016 806 314 002 524 014 806 313 002 524 014 806 313 002 524 012 806 314 002 524 012 806 314 001 524 018 806 314 001 524 016 806 314 001 524 014 806 314 001 524 010

STANDARD  
64-126μ



Type: BR-S45 BR-46 BR-S46 BR-49 CD-SS51 DI-41 DI-S41 DI-SS41 DI-42 DI-43

Total Length(mm):	16.5	19.0	16.5	19.0	15.5	19.0	16.5	15.5	19.0	19.0
Working length(mm):	0.65	0.85	0.85	0.55	2.0	2.0	2.0	2.0	3.0	2.0

ISO: 806 313 001 524 010 806 314 001 524 012 806 313 001 524 012 806 314 001 524 008 806 312 138 524 008 806 314 019 524 010 806 313 019 524 010 806 312 019 524 010 806 314 019 524 014 806 314 019 524 016

STANDARD  
64-126μ



Type: EX-11 EX-12 EX-SS13 EX-SS14 EX-17 EX-20 EX-21 EX-23 EX-24 EX-26

Total Length(mm):	19.0	20.0	16.5	16.5	23.0	19.0	19.0	19.0	23.0	19.0
Working length(mm):	4.8	7.0	6.0	6.0	10.0	5.0	5.0	0.1	10.0	5.0

ISO: 806 314 032 524 032 806 314 039 524 034 806 312 197 524 014 806 312 197 524 014 806 314 533 524 019 806 314 237 524 018 806 314 237 524 021 806 314 150 524 014 806 314 220 524 017 806 314 237 524 032

STANDARD  
64-126μ



Type: EX-28 EX-29 EX-31 EX-SS33 EX-38 EX-SS38 EX-41 EX-42 EX-43 EX-44

Total Length(mm):	21.0	20.0	19.0	16.0	19.0	16.0	19.0	19.0	19.0	19.0
Working length(mm):	7.0	7.0	4.0	4.0	4.0	4.0	3.0	3.5	3.5	3.6

ISO: 806 314 005 524 018 806 314 545 524 018 806 314 234 524 014 806 312 170 524 016 806 314 544 524 018 806 312 544 524 018 806 314 237 524 010 806 314 544 524 027 806 314 544 524 031 806 314 552 524 026

STANDARD  
64-126μ



Type: FO-11 FO-21 FO-S21 FO-22 FO-25 FO-27 FO-32 FO-S54 MI-S45 Pro-S3

Total Length(mm):	23.5	21.0	18.0	20.5	19.0	19.0	19.0	21.0	17.0	17.0
Working length(mm):	10.0	7.0	7.0	7.0	5.0	4.9	3.5	9.5	0.65	4.0

ISO: 806 314 299 524 013 806 314 298 524 014 806 313 298 524 014 806 314 298 524 016 806 314 257 524 028 806 314 257 524 032 806 314 257 524 018 806 313 190 524 017 806 313 001 524 010 806 313 277 524 023

STANDARD  
64-126μ



Type: RS-11 RS-21 RS-31 SF-11 SF-12 SF-13 SF-21 SF-31 SF-41 SF-S41

Total Length(mm):	23.0	20.0	19.0	21.5	21.5	21.0	20.0	19.0	19.0	16.5
Working length(mm):	10.0	7.0	4.0	8.0	8.0	8.0	7.0	4.5	4.0	3.5

ISO: 806 314 533 524 019 806 314 545 524 018 806 314 554 524 018 806 314 111 524 012 806 314 111 524 014 806 314 111 524 016 806 314 110 524 014 806 314 109 524 013 806 314 109 524 010 806 313 109 524 010

STANDARD  
64-126μ



Type: SI-45 SI-46 SI-S46 SI-47 SI-48 SI-S48 SO-20 SO-S20 SO-21 SR-11

Total Length(mm): 19.0 19.0 16.5 19.0 19.0 16.5 19.5 17.5 21.0 22.0

Working length(mm): 0.65 0.95 0.95 1.05 1.3 1.3 6.0 6.0 8.0 8.0

ISO: 806 314 010 524 010 806 314 010 524 013 806 313 010 524 013 806 314 010 524 014 806 314 010 524 016 806 313 010 524 016 806 314 288 524 012 806 313 288 524 012 806 314 289 524 014 806 314 141 524 012

STANDARD  
64-126μ



Type: SR-12 SR-S12 SR-13 TC-11 TC-16 TC-21 TC-S21 TC-SS21 TC-26 TF-11

Total Length(mm): 21.0 19.0 21.0 22.5 23.0 21.5 19.0 18.5 19.5 24.0

Working length(mm): 8.0 8.0 8.0 10.0 10.0 8.0 8.0 8.0 5.5 10.3

ISO: 806 314 141 524 014 806 313 141 524 014 806 314 141 524 016 806 314 160 524 016 806 314 166 524 018 806 314 160 524 014 806 313 160 524 014 806 312 160 524 014 806 314 160 524 010 806 314 173 524 014

STANDARD  
64-126μ



Type: TF-12 TF-S12 TF-13 TF-14 TF-20 TF-S20 TF-21 TF-S21 TF-22 TF-S22

Total Length(mm): 22.5 21.0 22.5 21.5 20.0 18.0 20.0 18.0 19.0 16.5

Working length(mm): 10.0 10.0 10.0 9.0 7.0 7.0 7.0 7.0 5.5 5.5

ISO: 806 314 173 524 016 806 313 173 524 016 806 314 173 524 018 806 314 172 524 023 806 314 171 524 014 806 313 171 524 014 806 314 171 524 016 806 313 171 524 016 806 314 170 524 021 806 313 170 524 021

STANDARD  
64-126μ



Type: TF-23 TF-S23 TF-31 TF-S31 TF-SS31 TF-41 TF-S41 TF-42 TF-43 TR-11

Total Length(mm): 19.0 16.5 19.0 16.5 15.5 19.0 16.5 19.0 19.0 22.5

Working length(mm): 5.0 5.0 4.0 4.0 4.0 3.5 3.5 4.0 4.0 10.0

ISO: 806 314 170 524 018 806 313 170 524 018 806 314 170 524 016 806 313 170 524 016 806 312 170 524 016 806 314 169 524 011 806 313 169 524 011 806 314 170 524 012 806 314 170 524 014 806 314 199 524 016

STANDARD  
64-126μ



Type: TR-12 TR-13 TR-S13 TR-14 TR-S14 TR-15 TR-19 TR-20 TR-21 TR-S21

Total Length(mm): 22.5 21.5 20.5 21.5 20.0 23.5 23.5 20.0 20.0 18.0

Working length(mm): 10.0 9.0 9.5 9.0 9.0 11.0 11.0 7.0 7.0 7.0

ISO: 806 314 119 524 016 806 314 198 524 018 806 313 198 524 018 806 314 198 524 022 806 313 198 524 022 806 314 200 524 022 806 314 200 524 023 806 314 197 524 013 806 314 197 524 016 806 313 197 524 016

STANDARD

64-126μ



Type: TR-SS21 TR-24 TR-25 TR-26 WF-30 WR-13 WR-S13

Total Length(mm):	17.5	20.0	23.0	22.0	19.0	19.0	16.5
Working length(mm):	7.0	7.0	10.0	9.0	0.5	1.6	1.6
ISO:	806 312 197 524 016	806 314 197 524 018	806 314 199 524 016	806 314 199 524 018	806 314 041 524 024	806 314 068 524 042	806 313 068 524 042

FINE

27-76μ



Type: BR-48F CD-50F CD-51F CD-52F CD-53F CD-54F CD-55F CD-56F CD-57F CD-58F

Total Length(mm):	19.0	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
Working length(mm):	0.5	0.5	2.0	3.5	2.0	2.0	1.0	2.0	3.5	3.0
ISO:	806 314 001 514 006	806 314 001 514 007	806 314 138 514 007	806 314 138 514 007	806 314 161 514 007	806 314 246 514 007	806 314 254 514 008	806 314 246 514 007	806 314 247 514 007	806 314 108 514 009

FINE

27-76μ




Type: CD-59F CD-60F CD-61F CD-62F CE-12F CE-13F CE-15F CE-16F CE-17F CR-11F

Total Length(mm):	17.5	16.5	16.5	16.5	21.5	19.0	19.0	22.0	22.0	19.0
Working length(mm):	7.0	2.0	3.5	3.0	9.0	5.0	4.5	9.0	8.0	5.0
ISO:	806 314 171 514 013	806 314 138 514 007	806 314 138 514 007	806 314 108 514 009	806 314 546 514 021	806 314 544 514 020	806 314 254 514 027	806 314 198 514 017	806 314 172 514 011	806 314 196 514 020

FINE

27-76μ

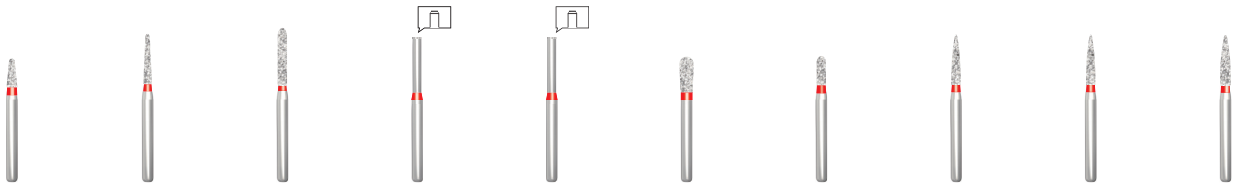

Type: CR-12F CR-21F CR-22F EX-18F EX-19F EX-21F EX-31F FO-21F FO-SS21F FO-22F

Total Length(mm):	19.0	20.0	21.5	21.0	20.0	19.0	19.0	21.0	18.5	20.5
Working length(mm):	4.0	7.0	8.0	0.1	0.1	5.0	4.0	7.0	7.5	7.0
ISO:	806 314 196 514 015	806 314 197 514 012	806 314 289 514 013	806 314 150 514 009	806 314 150 514 011	806 314 237 514 020	806 314 234 514 013	806 314 298 514 013	806 312 298 514 013	806 314 298 514 015

FINE

27-76μ



Type: FO-30F MI-45F MI-53F MI-61F MI-62F Pro-1F Pro-2F Pro-3F Pro-4F Pro-5F

Total Length(mm):	19.0	19.0	19.0	19.0	19.0	22.0	21.0	19.0	19.0	19.0
Working length(mm):	3.0	0.65	2.0	3.7	3.0	8.0	8.0	4.0	5.0	0.5
ISO:	806 314 254 514 015	806 314 001 514 010	806 314 161 514 007	806 314 138 514 007	806 314 108 514 009	806 314 198 514 020	806 314 198 514 017	806 314 227 514 023	806 314 237 514 019	806 314 041 514 039

FINE

27-76μ



Type: SR-10F SR-11F SR-12F TC-11F TC-S11F TC-21F TC-SS21F TF-12F TF-21F TR-11F

Total Length(mm): 21.5 21.5 21.0 22.5 20.5 21.5 19.0 22.5 20.0 22.5

Working length(mm): 8.0 8.0 8.0 10.0 10.0 8.0 8.0 10.0 7.0 10.0

ISO: 806 314 141 514 010 806 314 141 514 011 806 314 141 514 013 806 314 160 514 015 806 313 160 514 015 806 314 160 514 013 806 312 160 514 012 806 314 173 514 015 806 314 171 514 015 806 314 199 514 015

FINE

27-76μ



Type: TR-13F TR-21F TR-25F TR-26F TR-63F WR-31F WR-S31F

Total Length(mm): 21.5 20.0 23.0 22.0 20.5 19.0 16.5

Working length(mm): 9.0 7.0 10.0 9.0 8.0 0.5 0.5

ISO: 806 314 198 514 016 806 314 197 514 015 806 314 199 514 015 806 314 199 514 017 806 314 198 514 025 806 314 304 514 015 806 313 141 514 011

EXTRA FINE

10-36μ



Type: BR-40EF CE-12EF CE-13EF CE-15EF CE-16EF CR-11EF CR-12EF EX-SS13EF EX-SS14EF EX-21EF

Total Length(mm): 19.0 21.5 19.0 19.0 22.0 19.0 19.0 16.5 16.5 19.0

Working length(mm): 1.3 9.0 5.5 4.5 9.0 5.0 4.0 6.0 6.0 5.0

ISO: 806 314 001 504 016 806 314 546 504 020 806 314 544 504 019 806 314 254 504 026 806 314 198 504 016 806 314 196 504 019 806 314 196 504 014 806 312 197 504 012 806 312 197 504 012 806 314 237 504 019

EXTRA FINE

10-36μ



Type: EX-27EF EX-29EF EX-SS33EF EX-36EF EX-37EF EX-38EF EX-SS38EF FO-20EF FO-21EF FO-22EF

Total Length(mm): 21.0 20.0 16.0 19.0 19.0 19.0 16.0 20.0 21.0 20.5

Working length(mm): 7.0 7.0 4.0 3.5 2.0 4.0 4.0 6.0 7.0 7.0

ISO: 806 314 218 504 012 806 314 545 504 018 806 312 170 504 016 806 314 284 504 016 806 314 254 504 024 806 314 544 504 018 806 312 544 504 018 806 314 248 504 013 806 314 298 504 013 806 314 298 504 015

EXTRA FINE

10-36μ










Type: FO-30EF FO-40EF FO-41EF FO-42EF MI-53EF Pro-1EF Pro-2EF TC-11EF TC-21EF TF-12EF

Total Length(mm): 19.0 21.0 19.5 21.0 19.2 22.0 21.0 22.5 21.5 22.5

Working length(mm): 3.0 4.0 6.0 7.5 2.0 9.0 8.0 10.0 8.0 10.0

ISO: 806 314 254 504 014 806 314 243 504 009 806 314 248 504 009 806 314 248 504 011 806 314 161 504 006 806 314 198 504 021 806 314 198 504 018 806 314 160 504 014 806 314 160 504 012 806 314 173 504 014

							
<b>EXTRA FINE</b> 10-36μ							
<b>Type:</b>	TF-21EF	TR-11EF	TR-13EF	TR-S14EF	TR-21EF	TR-25EF	TR-26EF
<b>Total Length(mm):</b>	20.0	22.5	21.5	20.0	20.0	23.0	22.0
<b>Working length(mm):</b>	7.0	10.0	9.0	9.0	7.0	10.0	9.0
<b>ISO:</b>	806 314 171 504 014	806 314 199 504 014	806 314 198 504 015	806 314 198 504 020	806 314 197 504 013	806 314 199 504 014	806 314 199 504 016

## ■ Shank Type

Standard Shank

Short Shank (S)

Super Short Shank (SS)












## ■ Shape


- BC/Ball Collar Type
- CR/CR Inlay Preparation Dia-Burs
- CD/Children's Dentistry Dia-Burs
- DI/Double Inverted Cone
- EX/Special (Extra) Shape
- MI/Minimally Invasive
- RS/Rounded Shoulder
- SR/Straight Round End
- SI/Single Inverted Cone
- TC/Taper Conical End
- TR/Taper Round End
- WF/Wheel
- WR/Wheel Round Edge












# Carbide burs

## ■ Handle Type

	Short FG S	Standard FG	Long FG L	Extra Long FG SL	Extra Extra Long FG XL
Regular Length:	16.5mm	19.0mm	21.0mm	25.0mm	28.0mm
Special Length:					
FG-M15EZ:	18.5mm	21.0mm	23.0mm	27.0mm	28.0mm
FG-M15EB:	20.5mm	23.0mm	25.0mm	29.0mm	30.0mm

	FG-1/4	FG-1/2	FG-1	FG-2	FG-3	FG-4	FG-5	FG-6	FG-7	FG-8	
CYLINDER FLAT END (PLAIN)											
Type:	FG-1/4	FG-1/2	FG-1	FG-2	FG-3	FG-4	FG-5	FG-6	FG-7	FG-8	
Total Length(mm):	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	
Working length(mm):	0.5	0.6	0.8	1.0	1.2	1.4	1.6	1.8	2.1	2.3	
ISO:	500 314 001 006 005	500 314 001 006 006	500 314 001 006 008	500 314 001 006 010	500 314 001 006 012	500 314 001 006 014	500 314 001 006 016	500 314 001 006 018	500 314 001 006 021	500 314 001 006 023	

CYLINDER FLAT END (PLAIN)	
Type:	FG-10
Total Length(mm):	19.0
Working length(mm):	2.7
ISO:	500 314 001 006 027

	FG-33 1/2	FG-34	FG-35	FG-36	FG-37	FG-37L	FG-38	FG-39	FG-40	FG-41	
ROUND (PLAIN)											
Type:	FG-33 1/2	FG-34	FG-35	FG-36	FG-37	FG-37L	FG-38	FG-39	FG-40	FG-41	
Total Length(mm):	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	
Working length(mm):	0.7	0.8	1.0	1.2	1.4	3.5	1.6	1.8	2.1	2.3	
ISO:	500 314 010 006 006	500 314 010 006 008	500 314 010 006 010	500 314 010 006 012	500 314 010 006 014	500 314 010 006 014	500 314 010 006 016	500 314 010 006 018	500 314 010 006 021	500 314 010 006 023	

INVERTED CONE  
(PLAIN)



Type: FG-56 FG-56S FG-57 FG-57L FG-58 FG-59 FG-956 FG-957 FG-958

Total Length(mm):	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0
Working length(mm):	4.0	2.5	4.0	6.0	4.0	4.5	0.2	0.2	0.2
ISO:	500 314 109 006 008	500 314 107 006 008	500 314 107 006 010	500 314 107 006 010	500 314 107 006 012	500 314 107 006 014	500 314 150 006 008	500 314 150 006 010	500 314 150 006 012

INVERTED CONE  
(PLAIN)



Type: FG-170 FG-170L FG-171 FG-171L FG-172 FG-169L FG-169

Total Length(mm):	19.0	19.0	19.0	19.0	19.0	19.0	19.0
Working length(mm):	4.0	5.0	4.0	5.0	4.0	5.0	3.5
ISO:	500 314 170 006 010	500 314 168 006 010	500 314 168 006 012	500 314 168 006 012	500 314 168 006 016	500 314 171 006 009	500 314 168 006 009

PEAR(PLAIN)



Type: FG-1/2 P FG-1P FG-2P FG-4P FG-245 FG-246 FG-256 FG-257 FG-271 FG-329

Total Length(mm):	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0
Working length(mm):	1.2	1.5	2.0	3.25	3.0	4.0	3.0	2.5	4.0	1.5
ISO:	500 314 237 006 006	500 314 237 006 008	500 314 237 006 010	500 314 237 006 014	500 314 237 006 008	500 314 234 006 010	500 314 234 006 008	500 314 234 006 011	500 314 233 006 014	500 314 233 006 006

PEAR(PLAIN)



Type: FG-330 FG-330S FG-330M FG-330L FG-331 FG-331L FG-332 FG-332L FG-1931

Total Length(mm):	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0
Working length(mm):	2.0	1.5	2.5	3.5	2.0	3.5	2.0	4.0	2.0
ISO:	500 314 232 006 008	500 314 232 006 008	500 314 232 006 008	500 314 232 006 008	500 314 232 006 010	500 314 232 006 010	500 314 232 006 012	500 314 232 006 012	500 314 237 008 010

CYLINDER FLAT END  
(CROSSCUT)



Type: FG-556 FG-556L FG-557 FG-557S FG-557L FG-558 FG-558L FG-559 FG-560 FG-562

Total Length(mm):	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0
Working length(mm):	4.0	5.0	4.0	2.5	6.0	4.0	5.0	4.5	4.5	5.0
ISO:	500 314 107 008 008	500 314 109 008 008	500 314 107 008 010	500 314 107 008 010	500 314 109 008 010	500 314 107 008 012	500 314 109 008 012	500 314 107 008 014	500 314 107 008 016	500 314 107 008 021

CYLINDER FLAT END  
(CROSSCUT)



Type: FG-563

Total Length(mm):	19.0
Working length(mm):	5.0
ISO:	500 314 107 008 023

TAPER FLAT END  
(CROSSCUT)



Type: FG-698    FG-699    FG-699L    FG-700    FG-700L    FG-701    FG-701L    FG-702    FG-703    FG-703L

Total Length(mm):	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0
Working length(mm):	4.0	4.0	5.0	4.0	5.0	4.0	6.0	5.0	5.0	7.0
ISO:	500 314 168 008 008	500 314 168 008 009	500 314 168 008 009	500 314 168 008 010	500 314 168 008 010	500 314 168 008 012	500 315 171 008 012	500 314 168 008 016	500 314 168 008 021	500 314 168 008 021

TAPER FLAT END  
(CROSSCUT)



Type: FG-704    FG-701X    FG-M23DC

Total Length(mm):	19.0	19.0	19.0
Working length(mm):	5.0	4.0	4.0
ISO:	500 314 168 008 023	500 314 168 019 012	500 314 194 021 012

CYLINDER ROUND END  
(PLAIN)



Type: FG-1156    FG-1157    FG-1158    FG-1159    FG-M21DC

Total Length(mm):	19.0	19.0	19.0	19.0	19.0
Working length(mm):	4.0	4.0	4.0	4.0	4.0
ISO:	500 314 137 006 009	500 314 137 006 010	500 314 137 006 012	500 314 137 006 014	500 314 137 021 010

CYLINDER ROUND END  
(CROSSCUT)



Type: FG-1556    FG-1557    FG-1558    FG-1559    FG-1957    FG-1958

Total Length(mm):	19.0	19.0	19.0	19.0	19.0	19.0
Working length(mm):	4.0	4.0	4.0	4.0	4.0	4.0
ISO:	500 314 037 008 008	500 314 137 008 010	500 314 137 008 012	500 314 137 008 014	500 314 137 008 010	500 314 137 008 012

Taper ball Shape



Type: FG-M16DB FG-M15EZ FG-M15ZB FG-1970 FG-1169L FG-1170 FG-1170L FG-1171 FG-1171L FG-1172

Total Length(mm): 19.0 21.0 23.0 19.0 19.0 19.0 19.0 19.0 19.0 19.0

Working length(mm): 5.5 9.0 11.0 4.0 5.0 4.0 5.0 4.0 5.0 4.0

ISO: 500 314 196 006 016 500 314 198 006 015 500 314 199 006 015 500 314 194 008 010 500 314 196 006 009 500 314 196 006 010 500 314 196 006 010 500 314 196 006 012 500 314 196 006 012 500 314 196 006 016

Taper ball Shape



Type: FG-M14CF FG-7901 FG-7902 FG-7903

Total Length(mm): 19.0 19.0 19.0 19.0

Working length(mm): 6.0 4.0 4.0 4.0

ISO: 500 314 164 001 014 500 314 496 072 010 500 314 496 072 011 500 314 496 072 012

Olive ball shape



Type: FG-7104 FG-7106 FG-7108 FG-7404 FG-7406 FG-7408

Total Length(mm): 19.0 19.0 19.0 19.0 19.0 19.0

Working length(mm): 3.5 4.0 4.0 3.5 4.0 4.0

ISO: 500 314 254 072 014 500 314 254 072 018 500 314 254 072 023 500 314 277 072 014 500 314 277 072 018 500 314 277 072 023



INNODENT Co.,Ltd  
5F 514, 15, Haeyang 3-ro, Sangnok-gu,  
Ansan-si, Gyeonggi-do, Korea  
[www.innodent.company](http://www.innodent.company)